

passion
for precision



HX and XSpeed-H

define new horizons for high-hard steels



FRAISA
ToolExpert®

Powerful HDC milling strategy for 2.5D and 3D machining of high-hard steels

Innovation made by FRAISA: high dynamic cutting in mold making

HDC machining has already proven its worth in multiple applications with nonhardened materials. And yet HDC machining is almost unknown in the field of mold making. With this in mind, FRAISA has developed two new types of tools that break into precisely this area and realize their enormous potential there. The **HX** and **XSpeed-H** are perfect additions to the **HX family**, which has been specifically designed for high-performance milling of high-hard steels. Optimal tool geometries developed specifically for machining hardened steels, combined with an extremely hard Duro-Si coating, guarantee not only a long service life, but also universal operating conditions with 100% HDC suitability.

HX tools are designed to be very robust and they are optimized for high cutting rates. The four-edged tool is ideal for materials with a hardness of more than 50 HRC and develops its maximum performance in 2.5D and 3D machining. In HDC applications, the contact length of the cutting edges with the material is long. The orbital motion in the case of the HDC strategy guarantees consistent chip thickness and cutting forces, for which the **HX** is precisely designed. The result is exceptionally high machining rates and a long service life.

But the **HX** also masters HPC applications with flying colors, highlighting the universal character of this tool.

The **HX** is equipped with a highly precise corner radius. This makes the very strong and precise **HX** virtually ideal for finishing operations with very narrow tolerance bands and premium surfaces.

Shifting the focus from universality to a long tool life, this is where the **XSpeed-H** comes into its own. The new **XSpeed-H** has been developed especially for HDC and HSC milling. The high number of cutting edges – with up to eight teeth – guarantees silky smooth movement of the milling tool.

As a result, wear and tear is spread across eight cutting edges and the tools can enjoy a very long service life. **XSpeed-H** milling tools enable feed rates to be doubled for both HSC and HDC milling. This is a very positive product feature that plays to the capabilities of today's highly dynamic milling machines and reduces production costs long-term.

The benefits:

- **Increased productivity** through use of the HDC milling strategy now also with 2.5D and 3D machining of hardened steels
- **Good cost efficiency** through faster milling processes with long tool life and fast feed and cutting rates
- **Maximum component accuracy** thanks to the tool's extreme concentricity, shank accuracy, and resulting precision
- **Lower tool costs** due to reduced wear thanks to Duro-Si hard coating and optimized wear distribution
- **Services available** FRAISA ToolCare® tool management system **FRAISA ReTool®** tool reconditioning, and **FRAISA ReToolBlue** tool recycling




FRAISA ReTool® – Industrial tool reconditioning with performance guarantee

FRAISA ReTool® offers an all-round service that restores your used tools to their original performance level and optimizes your processes. FRAISA and third-party tools are reconditioned using the very latest technology – and in a resource-friendly way. The outcome: mint-condition tools as productive as they were the first day they were used. And to make things even better, your level of investment is lower than if you were to buy new tools, you increase your productivity and you save costs.


FRAISA ReTool® – a performance guarantee founded on integrated development of the tools and the reconditioning process

We guarantee that following their reconditioning with FRAISA ReTool®, your used tools will be restored to the original performance level they had when new. Our ability to provide this performance guarantee is a priority of our team of experts right from very early on in product development.

That's why the development of the reconditioning process is an integral part of the development phase, alongside the actual product tests and calculating the cutting data. Strict rules apply: the FRAISA ReTool® process is approved only if we are able to fulfil our performance guarantee 100%.

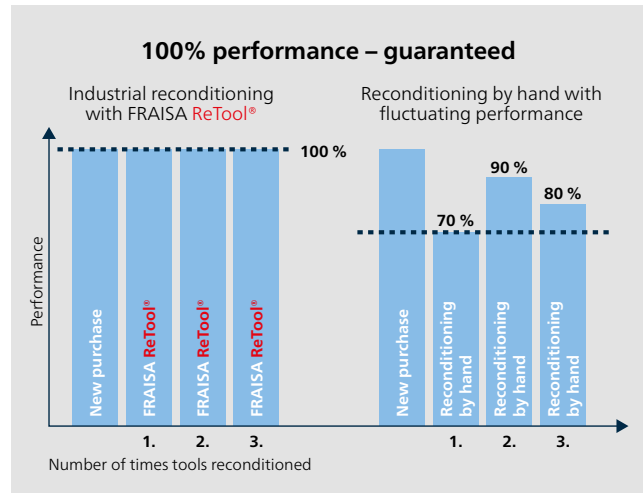

[3]

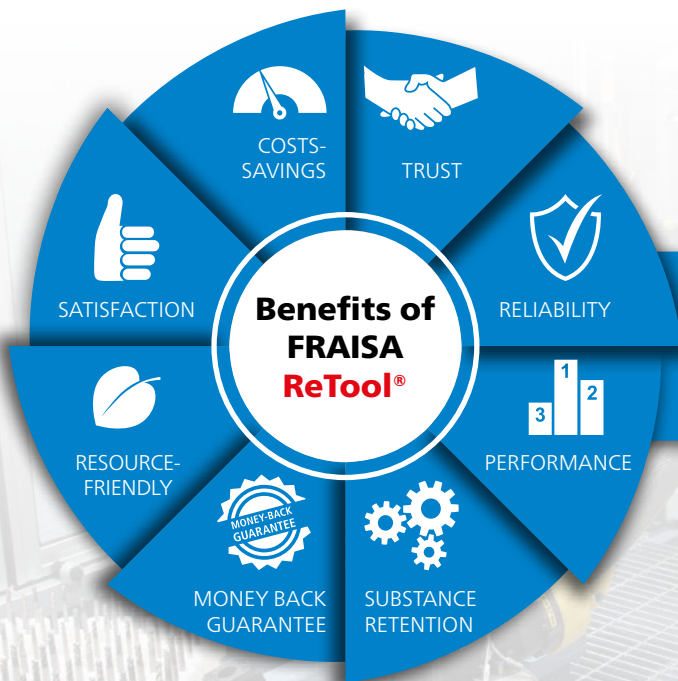

FRAISA ReToolBlue – recycle rather than throw away

With our FRAISA ReToolBlue service, we recycle the valuable carbide from tools that can no longer be reconditioned.

FRAISA ReTool® makes economic sense for you, too: After reconditioning them, we return your tools to you in mint condition. We restore them to their original performance level at a price that's more cost-effective for you than purchasing new ones or reconditioning them by hand.







Over 30 years' experience in tool reconditioning:

Our competence center in Germany is Europe's largest service center for carbide milling tools.



Video on our service product: FRAISA ReTool®

All-round talents: Versatile

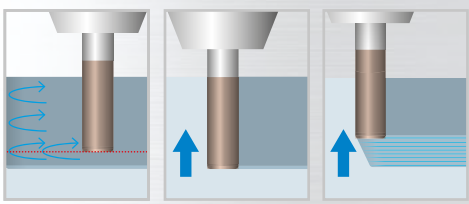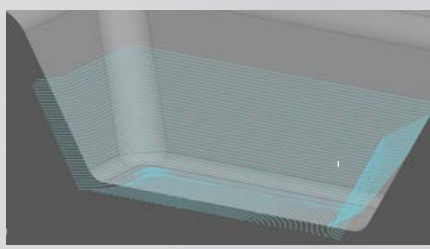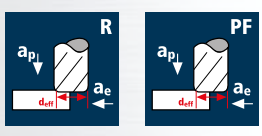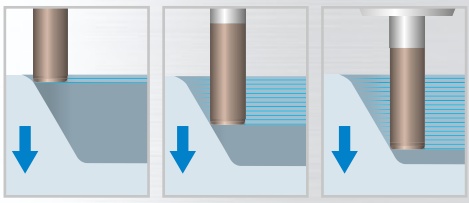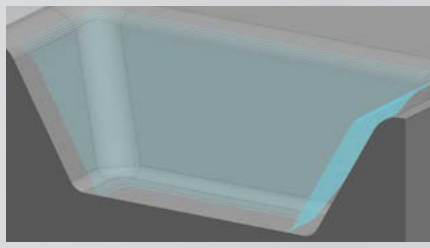Application	Milling strategy	Tool path
<p>High Dynamic Cutting – HDC</p> 	<p>Bottom-up strategy</p> 	
<p>High Speed Cutting – HSC</p> 	<p>Top-down strategy</p> 	

[4]

With the high-speed HDC roughing strategy, productivity can be increased even more significantly compared to HPC milling. Machining processes are sped up, tools are protected and the machine environment can be put to optimum use at lower costs.

For HSC milling, tools with a large number of cutting edges are used. The cutting and feed rates are much higher than for normal machining. In particular, HSC is used for pre-finishing in tool and mold making.

Our tools in action – get to know our all-round talents




HX






XSpeed-H



The combination of highly innovative features results in a **very powerful overall concept**



The technologies

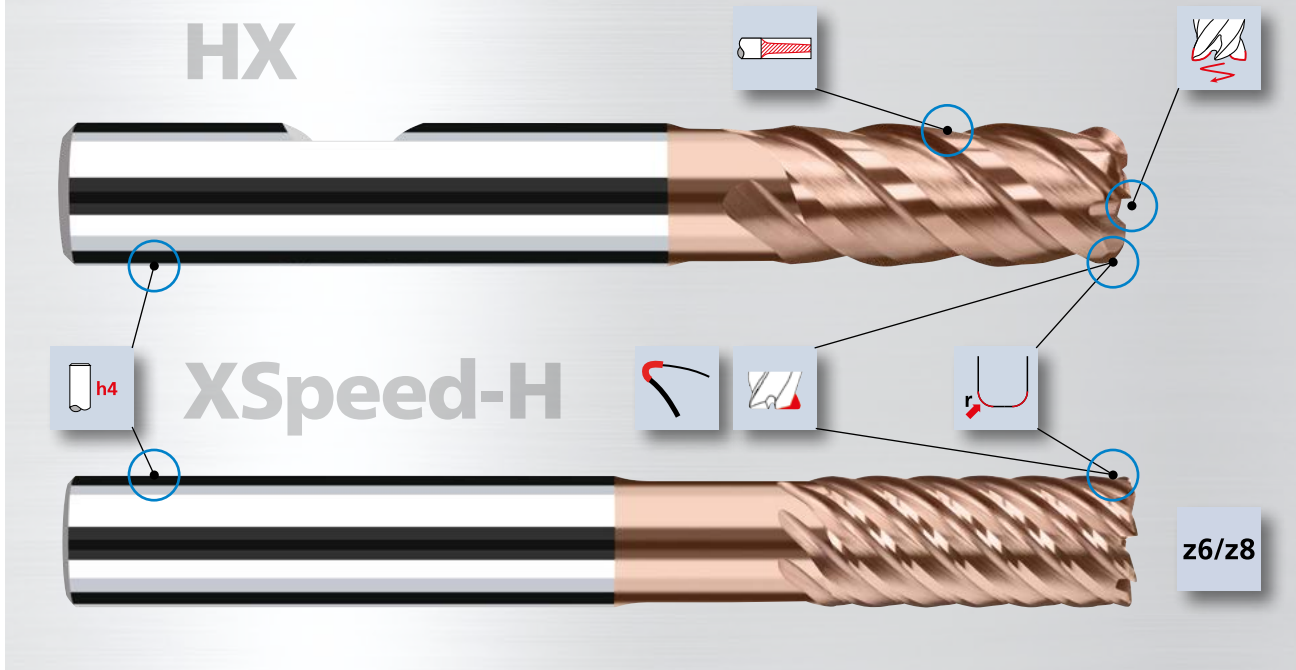

[5]



Milling tools with polished teeth

- Reinforcement of the exposed cutting edge
- Absorption of higher cutting forces



High-performance penetration edge

- Easy-cutting, high-performance penetration edge for high penetration angles of up to 5° in all hardened steels
- Better performance, longer tool life, and greater process reliability during penetration



Milling tools with increasing core diameter

- Improved tool rigidity and less deflection of the tool
- Superior performance for infeeds a_p , a_e , and the feed rate f_z
- Better component accuracy and less vibration
- Allows even heavy roughing steps



Milling tools with special edge conditioning

- Conditioning of the main cutting edge for greater cutting-edge stability
- Increased mechanical and thermal loading of the cutting edge
- Overall lengthening of tool life



High-precision radius tolerance of 0/+0.015 mm

- Specially configured position tolerances simplify programming and guaranteed completion of the final contour
- High-precision tolerance zone for excellent dimensional accuracy



Milling tools with H4 shank











- High concentricity and accuracy of eccentricity
- Higher clamping force in nonpositive chucks (hot shrinking, hydraulic expansion chuck)
- Important: Degrease the tool and chucking device before assembly in order to increase the holding force and prevent tool slippage!

z6/z8

Large number of cutting edges


- Increased dynamics and feed rate
- Reduced tool wear

Impressive thanks to wide range of applications

Application	HX	XSpeed-H
 Penetration w. helical interpolation	++	+
 Penetration with ramping	++	+
 Roughing in HDC-S	+	++
 Pre-finishing	+	++
 Finishing	+	++
 Plane roughing in HSC	++	++
 Plane finishing in HSC	+	++
 Pre-finishing steep sections in HSC	+	++
 Finishing steep sections in HSC	+	++
 Paths in HPC	++	
 Slots in HPC	++	

The two new milling cutters in the **HX family** – the **HX** and the **XSpeed-H** – complement each other excellently in all fields of machining hardened steels, especially in mold making. In particular, high-hard steels can be machined efficiently.

Tool life with HDC milling in 1.2379

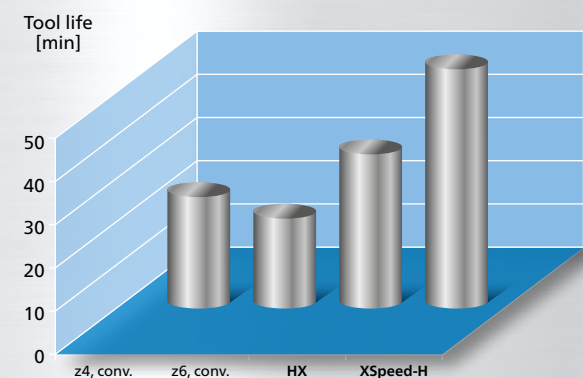

XSpeed-H: for HDC and HSC strategy
HX: for HPC and HDC strategy


Long tool life

What's more, the cutting edges suffer from very little wear and retain extremely good cutting performance even after a long time in use.

This very high resistance to wear means the lifespan of the tools can be extended considerably.


Efficient machining of high-hard steels

XSpeed-H, z8:
Dia. 3–12, ER 0.2/0.5, standard length, ER tol. 0/+0.015

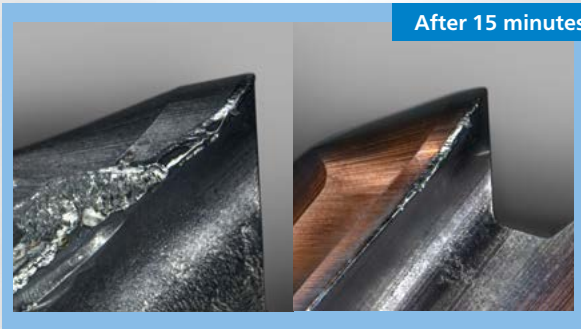

z6, conventional

XSpeed-H

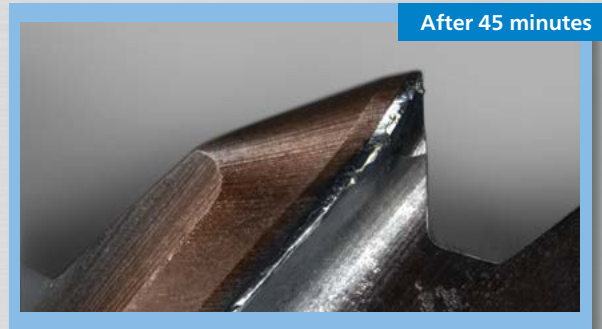

After 45 minutes

Material: 1.2379 (60 HRC), $n = 3,330$ rpm, $v_c = 105$ m/min,
 $v_f = 2,900$ mm/min, $f_z = 0.108$ (0.217 z4) mm/z, ER = 1, $a = 9$ mm, $a_e = 0.3$ mm (HDC milling)



Range of dimensions

HX, z4	XSpeed-H, z6	XSpeed-H, z8
Standard	Standard	Standard
Ø 3–Ø 16 25 GA	Ø 2–Ø 5 16 GA	Ø 6–Ø 12 16 GA
r 0.2/0.5/1.0/1.5/2.0/2.5/3.0	r 0.2/0.5	r 0.2/0.5

[7]

Range of materials

XSpeed, ToroX, MFC-R



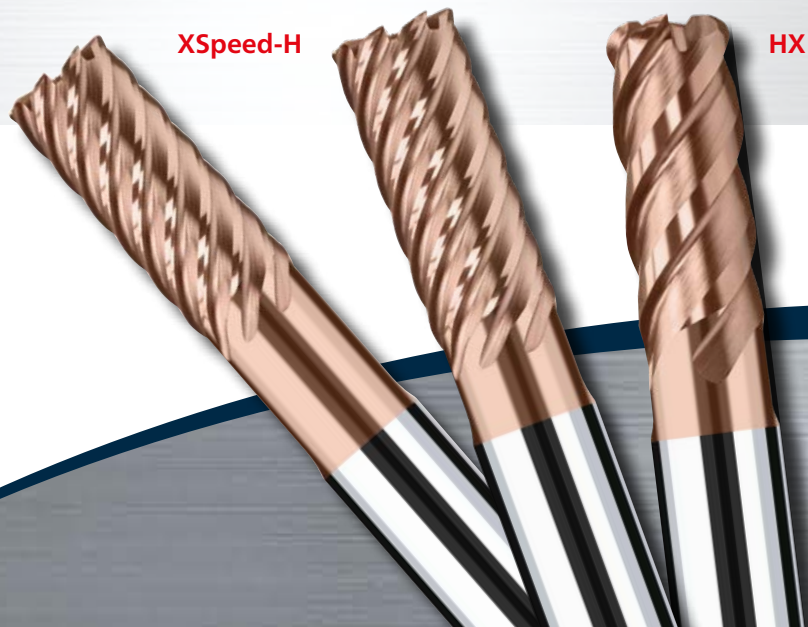
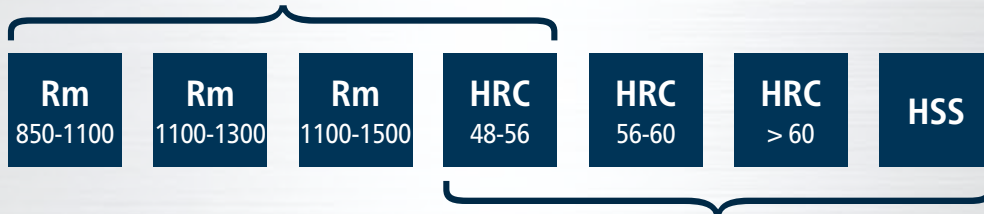


Corner radius end mills XSpeed-H

Tolerance r 0/+0.015, 4.5xd



HM
XA λ 45°
 γ -10°

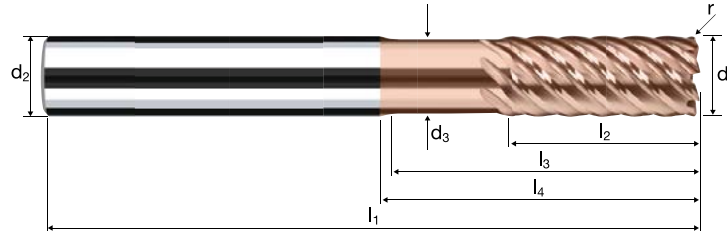



				HRC 48-56	HRC 56-60	HRC > 60				HSS
--	--	--	--	--------------	--------------	-------------	--	--	--	-----

Example: Order-N°											DURO-Si	
											H7212	
Ø Code	d ₁ 0/+0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z		
138	2.00	6.00	1.90	61	5.00	9.00	17.31	0.200	6.8°	6		●
178	3.00	6.00	2.80	61	8.00	13.50	20.13	0.200	4.5°	6		●
218	4.00	6.00	3.70	66	11.00	18.00	22.95	0.200	2.7°	6		●
258	5.00	6.00	4.60	66	13.00	22.50	25.77	0.200	1.3°	6		●
297	6.00	6.00	5.50	69	13.00	30.34	31.00	0.200	0.0°	8		●
385	8.00	8.00	7.40	80	19.00	39.29	40.00	0.200	0.0°	8		●
445	10.00	10.00	9.20	90	22.00	47.20	48.00	0.200	0.0°	8		●
496	12.00	12.00	11.00	105	26.00	54.13	55.00	0.200	0.0°	8		●
140	2.00	6.00	1.90	61	5.00	9.00	17.31	0.500	6.8°	6		●
180	3.00	6.00	2.80	61	8.00	13.50	20.13	0.500	4.5°	6		●
220	4.00	6.00	3.70	66	11.00	18.00	22.95	0.500	2.7°	6		●
260	5.00	6.00	4.60	66	13.00	22.50	25.77	0.500	1.3°	6		●
300	6.00	6.00	5.50	69	13.00	30.34	31.00	0.500	0.0°	8		●
388	8.00	8.00	7.40	80	19.00	39.29	40.00	0.500	0.0°	8		●
448	10.00	10.00	9.20	90	22.00	47.20	48.00	0.500	0.0°	8		●
498	12.00	12.00	11.00	105	26.00	54.13	55.00	0.500	0.0°	8		●

[8]

Corner radius end mills XSpeed-H

Tolerance r 0/+0.015, 3xd

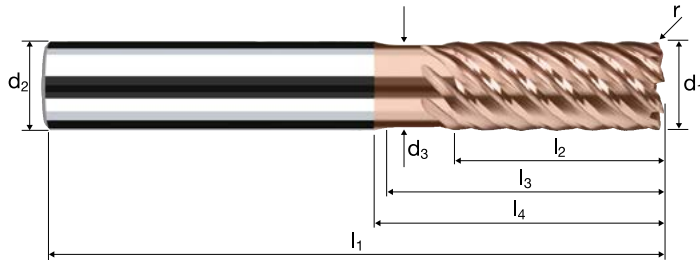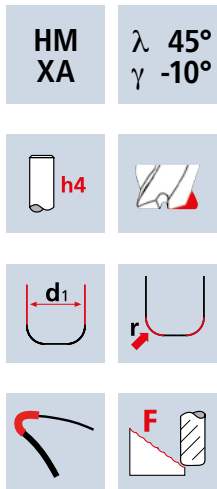

				HRC 48-56	HRC 56-60	HRC > 60				HSS
--	--	--	--	--------------	--------------	-------------	--	--	--	-----




Example: Order-N°.											DURO-Si	
											H7210	
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z		
138	2.00	6.00	1.90	57	5.00	6.00	14.31	0.200	8.2°	6	●	
178	3.00	6.00	2.80	57	8.00	9.00	15.63	0.200	5.7°	6	●	
218	4.00	6.00	3.70	57	11.00	12.00	16.95	0.200	3.6°	6	●	
258	5.00	6.00	4.60	57	13.00	15.00	18.27	0.200	1.8°	6	●	
297	6.00	6.00	5.50	57	13.00	19.34	20.00	0.200	0.0°	8	●	
385	8.00	8.00	7.40	63	19.00	25.29	26.00	0.200	0.0°	8	●	
445	10.00	10.00	9.20	72	22.00	30.20	31.00	0.200	0.0°	8	●	
496	12.00	12.00	11.00	83	26.00	36.13	37.00	0.200	0.0°	8	●	
140	2.00	6.00	1.90	57	5.00	6.00	14.31	0.500	8.2°	6	●	
180	3.00	6.00	2.80	57	8.00	9.00	15.63	0.500	5.7°	6	●	
220	4.00	6.00	3.70	57	11.00	12.00	16.95	0.500	3.6°	6	●	
260	5.00	6.00	4.60	57	13.00	15.00	18.27	0.500	1.8°	6	●	
300	6.00	6.00	5.50	57	13.00	19.34	20.00	0.500	0.0°	8	●	
388	8.00	8.00	7.40	63	19.00	25.29	26.00	0.500	0.0°	8	●	
448	10.00	10.00	9.20	72	22.00	30.20	31.00	0.500	0.0°	8	●	
498	12.00	12.00	11.00	83	26.00	36.13	37.00	0.500	0.0°	8	●	

Corner radius end mills HX

Smooth-edged, normal version with short neck
High-performance penetration edge



HM
XA λ 45°
 γ -10°

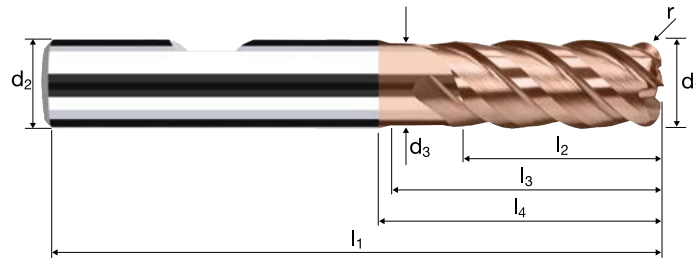

Roughing HPC Roughing HDC Finishing

				HRC 48-56	HRC 56-60	HRC > 60			HSS
--	--	--	--	--------------	--------------	-------------	--	--	-----

Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z	DURO-Si	
											H8607	H8507
178	3.00	6.00	2.80	57	8.00	14.00	20.37	0.200	4.5°	4	●	●
218	4.00	6.00	3.70	57	11.00	16.00	20.82	0.200	3.0°	4	●	●
258	5.00	6.00	4.60	57	13.00	18.00	21.27	0.200	1.5°	4	●	●
297	6.00	6.00	5.50	57	13.00	18.15	20.00	0.200	0.0°	4	●	●
385	8.00	8.00	7.40	63	19.00	23.63	26.00	0.200	0.0°	4	●	●
445	10.00	10.00	9.20	72	22.00	27.99	31.00	0.200	0.0°	4	●	●
496	12.00	12.00	11.00	83	26.00	33.29	37.00	0.200	0.0°	4	●	●
605	16.00	16.00	15.00	92	32.00	38.73	43.00	0.200	0.0°	4	●	●
180	3.00	6.00	2.80	57	8.00	14.00	20.37	0.500	4.5°	4	●	●
220	4.00	6.00	3.70	57	11.00	16.00	20.82	0.500	3.0°	4	●	●
260	5.00	6.00	4.60	57	13.00	18.00	21.27	0.500	1.5°	4	●	●
300	6.00	6.00	5.50	57	13.00	18.15	20.00	0.500	0.0°	4	●	●
388	8.00	8.00	7.40	63	19.00	23.63	26.00	0.500	0.0°	4	●	●
448	10.00	10.00	9.20	72	22.00	27.99	31.00	0.500	0.0°	4	●	●
498	12.00	12.00	11.00	83	26.00	33.29	37.00	0.500	0.0°	4	●	●
606	16.00	16.00	15.00	92	32.00	38.73	43.00	0.500	0.0°	4	●	●




[10]

Corner radius end mills HX



Smooth-edged, normal version with short neck
High-performance penetration edge

HM
XA λ 45°
 γ -10°

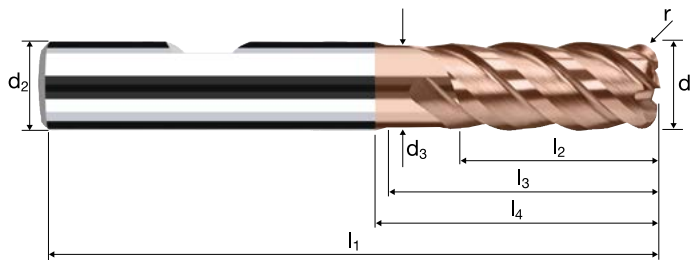

Roughing HPC Roughing HDC Finishing

				HRC 48-56	HRC 56-60	HRC > 60				HSS
--	--	--	--	--------------	--------------	-------------	--	--	--	-----

Example: Order-N°.											DURO-Si	
											H8607	
											H8507	
Ø Code	d ₁ 0/-0.01	d ₂ h4	d ₃	l ₁	l ₂	l ₃	l ₄	r 0/+0.015	α	z		
302	6.00	6.00	5.50	57	13.00	18.15	20.00	1.000	0.0°	4		●
391	8.00	8.00	7.40	63	19.00	23.63	26.00	1.000	0.0°	4		●
450	10.00	10.00	9.20	72	22.00	27.99	31.00	1.000	0.0°	4		●
501	12.00	12.00	11.00	83	26.00	33.29	37.00	1.000	0.0°	4		●
608	16.00	16.00	15.00	92	32.00	38.73	43.00	1.000	0.0°	4		●
304	6.00	6.00	5.50	57	13.00	18.15	20.00	1.500	0.0°	4		●
395	8.00	8.00	7.40	63	19.00	23.63	26.00	2.000	0.0°	4		●
457	10.00	10.00	9.20	72	22.00	27.99	31.00	2.500	0.0°	4		●
507	12.00	12.00	11.00	83	26.00	33.29	37.00	3.000	0.0°	4		●



Scan this QR code to find more information on the FRAISA Group.



The fastest way to our E-Shop.

FRAISA SA

Gurzelenstr. 7 | CH-4512 Bellach | Switzerland |
Tel.: +41 (0) 32 617 42 42 |
mail.ch@fraisa.com | fraisa.com |

You can also find us at:

facebook.com/fraisagroup
youtube.com/fraisagroup
linkedin.com/company/fraisa

passion
for precision



7 613088 518720

HIB02019 02/2022 EN